



EN Series Screw Air Compressors

Essentials Encapsulated

ELGi

Always Better.

UPTIME[™]
ASSURANCE



CIN: L29120TZ1960PLC000351

www.elgi.com

2.2 - 45 kW / 03 - 60 HP



A Tradition of Reliability

ELGi, established in 1960, designs and manufactures a wide range of air compressors. The company has gained its reputation for design and manufacture of screw compressors through strategic partnerships and continuous research and development. Over the years, it has emerged as a multi-product, multi-market enterprise providing total compressed air solutions in all segments. ELGi's design capabilities translated into a wide range of products ranging from oil-lubricated and oil-free rotary screw compressors, reciprocating compressors and centrifugal compressors. ELGi has its own manufacturing operations in India, Italy and USA with subsidiaries in Australia, Brazil, UAE and Indonesia. The company is fast expanding its global footprint attracting distributors and customers with its latest generation products.



Robust Infrastructure

ELGi has modern manufacturing facilities equipped with advanced high precision grinding machines, turning centres and CNC horizontal and vertical machining centres. Screw airends are manufactured with the latest rotor grinding technology, coupled with measurement technology to maintain precise manufacturing tolerances. ELGi's manufacturing plants are both ISO and EOHS certified. The products are manufactured under controlled environment to ensure that its quality continues to meet the highest standards.



Innovative Technology

Screw Compressor elements are manufactured in-house using state-of-the-art machining centres for rotor grinding and machining castings of various sizes. ELGi's own eta-V profile rotors ensure energy-efficient compressed air supply for all demanding applications. ELGi is one of the few companies capable of manufacturing wide range of airends and compressor packages in the world. ELGi's patent portfolio is a testament to the company's continuous research and innovation capability




AIR UP.

UPTIME™ comes standard on every EN Series Compressor



UPTIME Design

This speaks to the engineering and design of our products. Our R&D is dedicated to designing machines that run cooler, cleaner and longer... that are easy to service... with longer service intervals.



UPTIME Components

For so many of our customers, seeing is believing. They know a quality-built machine when they see it. That's why every part on a ELGi compressor is a quality part. From our proprietary air ends, to our use of leak-free hoses and piping.




UPTIME Assurance

Here is where we back our pledge, Our industry leading warranties, parts availability and call centers staffed by experts assure peace-of-mind to our customers.

EN Series

compact, silent and efficient

Essentials Encapsulated

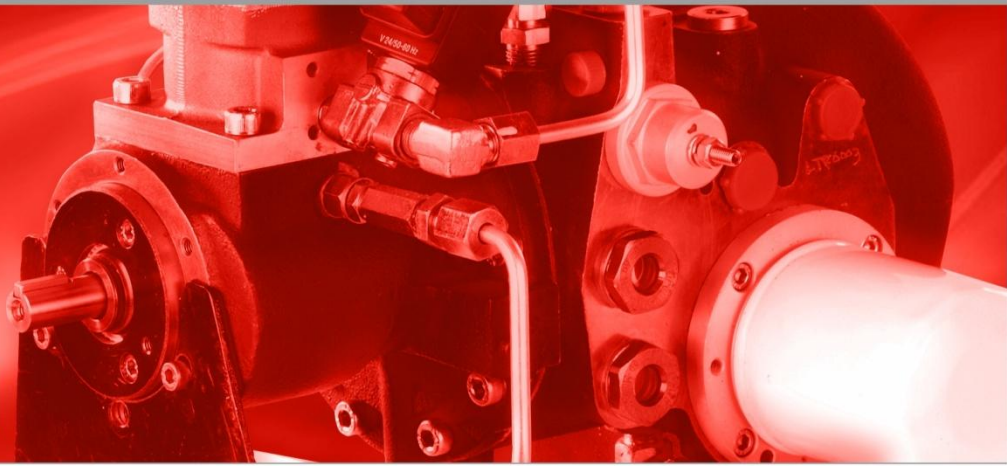

ELGi's EN series screw compressors are designed to encapsulate all functional components and compressor within a common housing. With its small footprint, high reliability and low maintenance requirements, the compressors are ideal for all industrial applications where size, efficiency and cost matter.

UPTIME™
ASSURANCE



High reliability



Energy-efficient



Low cost of ownership



Ease of maintenance



Compact and silent

Encapsulated airend*

The EN series compressors are fitted with ELGi's unique assembly which encapsulates all major functional systems such as intake system, compression system and separation system within a common frame

- Energy efficient
- Minimal pressure drop across the system
- Compact
- Silent



* From EN 2 to EN 30


Efficient air-oil separation with (<3ppm)

The air-oil separation by impact and deceleration action involves three stages:

Stage 1: Impact of air-oil mixture on the tank circumferential area

Stage 2: Deceleration action of air-oil mixture to remove the oil particles

Stage 3: Air with minor traces of oil enters the spin on separator for purification

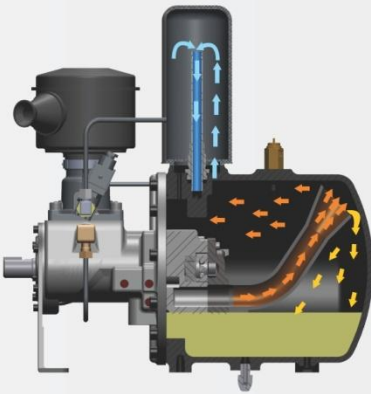

Ease of maintenance

- Single service door access to routine maintenance points
- Spin-on oil filter and separator elements for fast and easy routine service



Reliable Neuron Controller

The Neuron XT controller has been custom designed and engineered as an efficient control solution for encapsulated series. The system allows you to monitor and control overall performance with easy-to-use service indications, malfunction alarms and safety shutdowns. The controller is built-in with 'service protect' modules. It also includes a service and operational log feature to provide real-time feedback and increase system productivity



- Designed for wide range of temperatures upto 50°C
- Integration to energy management system
- MODBUS communications for DCS control through RS485 port
- In-built phase loss & phase reversal protection
- Remote start / stop facility

High efficiency motor

- Heavy duty TEFC / S1 / IP55 motor suited for ambient temperature up to 50°C
- Built-in safety systems



Energy Saving

In-Built ELGi Variable Frequency Drives (VFD)*

Matches compressor output with demand by varying motor speed. The power consumption reduces in line with the reduction in demand. This helps in eliminating the frequent load-unload cycle there by providing savings in energy.

* Available in select models only



Low cost of ownership

Design

- Space saving design
- Powered by ELGi's energy-efficient eta-V rotor profiles
- Zero leakage due to integration of components/connections
- Fewer parts and connections require only minimum maintenance

Operational

Longer life of consumables

- Efficient air filtration system where air enters through pre-filtered enclosure. Cleaner suction air keeps the internal components of the compressor clean and maintains optimum cooling efficiency
- Low oil-fill

Robust cooling system in high ambient temperature

- Air cooling with separate hot and cold zones
- High efficiency coolers and cooling fans ensure low operating temperature
- Improved cooling ensures longer life of compressor



After cooler is standard in all models

- Cold air
- Hot air

Technical Specification (50Hz)

Model	Motor Power		Working Pressure		Max. Pressure		Free Air Delivery		Weight*	Noise	Tank**
	50Hz	kW	HP	bar g	psi g	bar g	psi g	m ³ /min			
Length:615mm Breadth:715mm Height: 845mm											
EN 2	2.2	3.0	7.0	102	7.2	104	0.32	11.2	133	61	220/270
EN 2	2.2	3.0	9.5	138	9.7	141	0.25	8.7	133	61	220/270
EN 3	3.0	4.0	7.0	102	7.2	104	0.43	15.3	133	61	220/270
EN 3	3.0	4.0	9.5	138	9.7	141	0.36	12.7	133	61	220/270
EN 3	3.0	4.0	12.5	181	12.7	184	0.25	9.0	133	61	220/270
EN 4	4.0	5.0	7.0	102	7.2	104	0.54	19.0	143	64	220/270
EN 4	4.0	5.0	9.5	138	9.7	141	0.48	16.9	143	64	220/270
EN 4	4.0	5.0	12.5	181	12.7	184	0.40	14.2	143	64	220/270
EN 5	5.5	7.5	7.0	102	7.2	104	0.74	26.0	150	64	220/270
EN 5	5.5	7.5	9.5	138	9.7	141	0.64	22.4	150	64	220/270
EN 5	5.5	7.5	12.5	181	12.7	184	0.53	18.6	150	64	220/270
Length:875mm Breadth:800mm Height: 1008mm											
EN 5x	5.5	7.5	7.0	102	7.2	104	0.84	29.5	235	66	270/500
EN 5x	5.5	7.5	9.5	138	9.7	141	0.68	24.0	235	66	270/500
EN 5x	5.5	7.5	12.5	181	12.7	184	0.54	19.2	235	66	270/500
EN 7	7.5	10.0	7.0	102	7.2	104	1.13	40.0	260	66	270/500
EN 7	7.5	10.0	9.5	138	9.7	141	0.93	33.0	260	66	270/500
EN 7	7.5	10.0	12.5	181	12.7	184	0.76	27.0	260	66	270/500
EN 11	11.0	15.0	7.0	102	7.2	104	1.76	62.0	280	71	270/500
EN 11	11.0	15.0	9.5	138	9.7	141	1.47	52.0	280	71	270/500
EN 11	11.0	15.0	12.5	181	12.7	184	1.23	43.6	280	71	270/500
EN 15	15.0	20.0	7.0	102	7.2	104	2.04	72.0	310	71	270/500
EN 15	15.0	20.0	9.5	138	9.7	141	1.78	63.0	310	71	270/500
EN 15	15.0	20.0	12.5	181	12.7	184	1.57	55.5	310	71	270/500
Length: 930mm Breadth: 1150mm Height: 1450mm											
EN 15x	15.0	20.0	7.0	102	7.2	104	2.48	88	520	69	BM
EN 15x	15.0	20.0	9.5	138	9.7	141	2.12	75	520	69	BM
EN 15x	15.0	20.0	12.5	181	12.7	184	1.81	64	520	69	BM
EN 18	18.5	25.0	7.0	102	7.2	104	3.11	110	558	69	BM
EN 18	18.5	25.0	9.5	138	9.7	141	2.63	93	558	69	BM
EN 18	18.5	25.0	12.5	181	12.7	184	2.15	76	558	69	BM
EN 22	22.0	30.0	7.0	102	7.2	104	3.54	125	610	69	BM
EN 22	22.0	30.0	9.5	138	9.7	141	3.06	108	610	69	BM
EN 22	22.0	30.0	12.5	181	12.7	184	2.60	92	610	69	BM
EN 30	30.0	40.0	7.0	102	7.2	104	4.30	152	678	69	BM
EN 30	30.0	40.0	9.5	138	9.7	141	3.60	127	678	69	BM
EN 30	30.0	40.0	12.5	181	12.7	184	3.00	106	678	69	BM
Length: 1250mm Breadth: 1025mm Height: 1650mm											
EN 30x	30.0	40.0	7.0	102	7.5	109	5.41	191	850	74	BM
EN 30x	30.0	40.0	9.5	138	10.0	145	4.39	155	850	74	BM
EN 30x	30.0	40.0	12.5	181	13.0	189	3.60	127	850	74	BM
EN 37	37.0	50.0	7.0	102	7.5	109	6.57	232	890	74	BM
EN 37	37.0	50.0	9.5	138	10.0	145	5.47	193	890	74	BM
EN 37	37.0	50.0	12.5	181	13.0	189	4.70	166	890	74	BM
EN 45	45.0	60.0	7.0	102	7.5	109	7.93	280	950	77	BM
EN 45	45.0	60.0	9.5	138	10.0	145	6.80	240	950	77	BM
EN 45	45.0	60.0	12.5	181	13.0	189	5.66	200	950	77	BM

Note : 1. Free Air Delivery (FAD) is tested as per ISO 1217 : 2009 Annexure C Edition: 4. Sound level measured as per ISO 2151, Second Edition at 1m distance in field conditions,+/-3dB(A)
2. BM - Base Mounted. * Weight and dimension are for Base Mounted models. ** Compressors mounted on horizontal receiver tank and dryer available as option (for models up to EN15)
3. DOL Starter for EN 2 to EN 7, Star Delta Starter for EN 11 to EN 45, EN 5 / EN 7 / EN 5x are also available with Star Delta Star
4. Due to continuous engineering improvements, the specifications are subject to change without prior notice.
5. Product images displayed in this brochure are only for representative purpose and may not exactly match the actual product
6. EN 2 - 9.5 is also available in 230V single phase 50Hz variant

Technical Specification - VFD Model

Model	Motor Power		Working Pressure		Max. Pressure		Free Air Delivery		Weight*	Noise	Tank**
	50Hz	kW	HP	bar g	psi g	bar g	psi g	m ³ /min			
Length:615mm Breadth:715mm Height: 845mm											
EN 5x	5.5	7.5	7.0	102	7.2	104	0.37~0.84	13~29.5	240	66	270/500
EN 5x	5.5	7.5	9.5	138	9.7	141	0.29~0.68	10.2~24	240	66	270/500
EN 7	7.5	10.0	7.0	102	7.2	104	0.55~1.20	19.5~42.5	265	66	270/500
EN 7	7.5	10.0	9.5	138	9.7	141	0.52~0.93	18.3~33	265	66	270/500
EN 11	11.0	15.0	7.0	102	7.2	104	0.89~1.77	31.5~62.5	285	71	270/500
EN 11	11.0	15.0	9.5	138	9.7	141	0.73~1.53	25.7~54	285	71	270/500
EN 15	15.0	20.0	7.0	102	7.2	104	1.01~2.05	35.5~72.4	315	71	270/500
EN 15	15.0	20.0	9.5	138	9.7	141	0.88~1.80	31~63.5	315	71	270/500

Note:

- Free Air Delivery (FAD) is tested as per ISO 1217 : 2009 Annexure E Edition: 4
- All standard models are air-cooled
- * Weight and dimension are for Base Mounted models. ** Compressors mounted on horizontal receiver tank and dryer available as option
- Sound level measures as per ISO 2151, Second Edition at 1m distance in field conditions, +/- 3dB(A)
- Due to continuous improvements, the specifications are subject to change without prior notice
- Product images displayed in this brochure are only representative and may not exactly match the actual product

ELGi Airmate Accessories



Moisture separator

- Capacity: 100-365 cfm
- Working pressure: 16 bar g



Downstream filter

- Capacity: 19-1200 cfm
- Working pressure: 7-60 bar
- Filtration range: 1-0.003 microns



Refrigeration air dryer

- Capacity: 10-2000 cfm
- Working pressure: 7-60 bar
- Filtration range: +3°C. PDP



Drain valves

- (Timer controlled & zero loss)
- Capacity : 50-2000 cfm
 - Working pressure: 16 bar
 - Media : Condensate



Dessicant air dryer


- Capacity : 10-45 cfm
- Working pressure : 16 bar g



Air receiver

- Capacity : 250-10000 ltrs.
- Working pressure : 7-12.5 bar
- Code of construction: ASME sec. VIII Div.I or IS 2825

Typical compressed air supply system

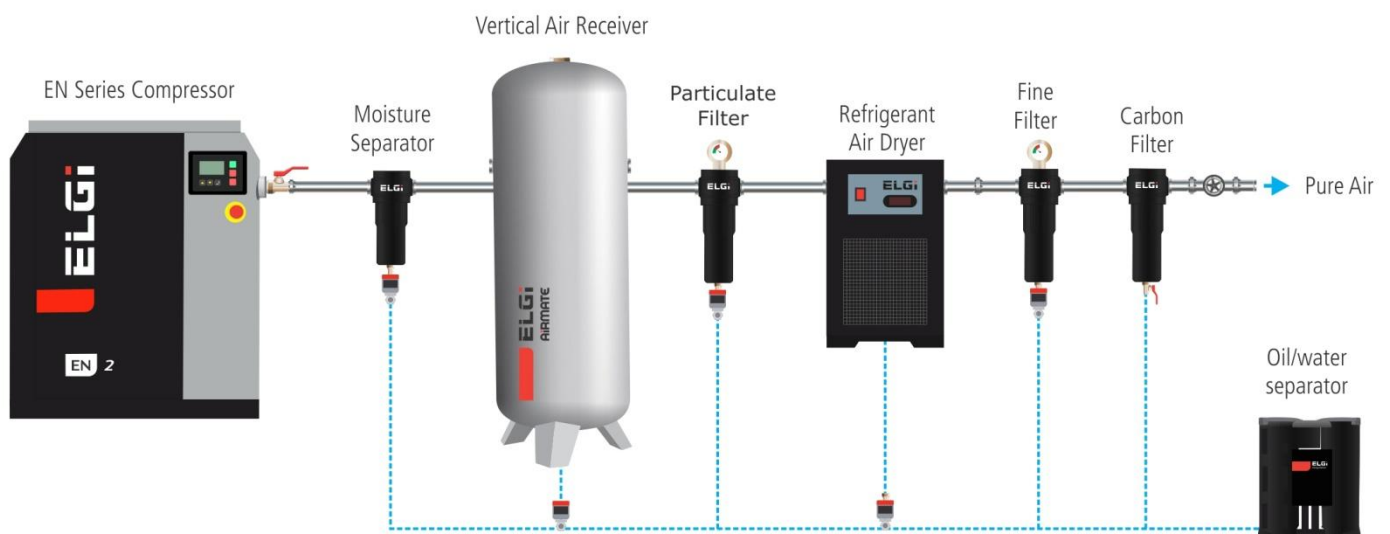

Genuine Spares

For enhancing performance and productivity



Compressed air solutions for all sustainable air needs



Oil-Free Series Screw
90 - 450 kW / 480 - 2515 cfm



EG Series Rotary Screw
11 - 250 kW / 47 - 1612 cfm



EN Series Rotary Screw
2.2 - 45 kW / 8.0 - 283 cfm



Electric Portable (Trolley)
22 - 75 kW / 131 - 490 cfm



Diesel portable (Trolley)
185 - 1100 cfm / 100 - 300 psi



Diesel Portable (Skid)
475 - 1500 cfm / 150 - 400 psi



Oil-free Recip
1.0 - 75 HP / 1.8 - 300 cfm



Oil-lubricated Recip
1.0 - 40 HP / 2.0 - 128 cfm

OVERSEAS OFFICES:

Bangladesh : ELGI Equipments Limited, 5th Floor, Planners Tower, Level: 5 Suite: 8-13, 13/A Bir Uttam CR Datt Road, Sonargaon, Dhaka-1000. Bangladesh. **T:** 880-9671453-65, **F:** 880-28616148, **E:** bangladesh-enquiry@elgi.com

Malaysia : ELGI Equipments Limited, No 2A-4-6, Jalan Jubli Perak, 22/1, Section 22, 40400, Shah Alam, Malaysia, **T:** +603 55693544, **F:** +603-55693544, **E:** malaysia-enquiry@elgi.com, **w:** www.elgi.com.my

Srilanka : S.G. Arcade, 2nd Floor, No.441, Sri Sangaraja Mawatha, Colombo-10, **T:** 00 - 94-11-2392425, **F:** 00-94-11-4737412. **E:** elgisupport@slnet.lk

Thailand : ELGI Equipments Limited, 223/66 Country Complex A 14th Floor, Sanphawut Road, Bangna Bangkok - 10260. **T:** +6627455160 **E:** thailand-enquiry@elgi.com, **w:** www.elgi.co.th

WHOLLY OWNED SUBSIDIARIES

Australia : ELGI Equipments Australia Pvt Ltd., 38. Richland Avenue, Coopers Plain QLD 4108 Australia. **T:** +61-7-3106 0589, **F:** +61-7-3106 0537, **E:** Enquiry@elgi.com.au, **w:** www.elgi.com.au

Brazil : ELGI Compressores Do Brasil Ltd., Av. Emilio Checchinato, 4195 - B: Cep : 13295 - 000, Bairro: Sao Roque da Chave: Itupeva - SP, Brazil. **T:** 4496 5519, 4496 6611, **E:** contacto@elgi.com.br, **w:** www.elgi.br

China : **ELGI Equipments (Zhejiang) Limited**, No.232, Yunhai Road, Economic Development Zone, Jiaxing 314033 P. R. China **T:** +86-573-82079100 Hotline: 400-826-3585 | **ELGI Compressors Trading (shanghai) Co. Ltd.**, Rm 909, LSHQ International Centre, 288 Hongjing Road, Shanghai 201103, P. R. China **T:** +86-21-33581191 Hotline: 400-826-3585, **E:** enquiry.cn@elgi.com, **w:** www.elgi.com.cn

Indonesia : PT ELGI Equipments Indonesia, Kawasan Pergudangan, BIZPARK Commercial Estate, Pulogadung Jl. Raya Bekasi KM 21, 5 Blok A3 No.12, Kel. Rawa Terate, Kec. Cakung, Pulogadung Jakarta Timur 13920. **T:** +62-21-46822216, 46827388, **E:** indonesia-enquiry@elgi.com, **w:** www.elgi.co.id

Italy : ELGI Compressors Italy S.r.l., Rome(RM), Via Del Babuino 51, 00187 : ROTAIR Spa, Via Bernezzo 67, 12023 Caraglio (CN), Italy. **T:** +39 0171619676, **F:** +39 0171619677, **E:** info@rotairspa.com

Middle East : ELGI Gulf (FZE), P.O. Box: 120695, Q4-081, SAIF Zone, Sharjah, U.A.E. **T:** +971 6 557 9970, **F:** + 971 6 557 9980, **E:** gulfenquiry@elgi.com

USA : ELGI Compressors USA, Inc. 1500-N Continental Blvd, Charlotte, NC 28273. **T:** +1-704-943-7966, **M:** +1-803-427-7985, **W:** www.elgi.us



ELGI EQUIPMENTS LIMITED

CORPORATE OFFICE: Trichy Road, Singanallur, Coimbatore - 641005,

T: +91-422-2589555, **E:** enquiry@elgi.com, **w:** www.elgi.com

Customer care mobile no.: +91 92821 11224 (SMS only)

Toll-free no: **1800-425-3544** (applicable for India only)

Distributed by

